

eX215 Web Tech-Note

15.6" Web based HMI, Capacitive Touchscreen, 1 Ethernet Port

- 15.6" TFT color display
- 1920X1080 pixels resolution, 16.7M colors
- Capacitive Multitouch
- 64-bit CPU, 1.6 GHz
- 1 Ethernet port
- Web Browser
- CORVINA Remote Connectivity - Option



Highlights

The HMIs of eX200 Web Series combine top web browsing performance with technical specification, features and performance that make them the ideal choice for edge devices where the requirements of applications in Industry 4.0 are the data control and the visualization.

The pSLC configuration of the flash memory is a great choice for long life applications that will write substantial amount of data over the life of the product. The power of the 64 bit processing platform running Linux and state-of-the-art cybersecurity design make these products great players in modern applications.

HTML5 web application interfaces are used to display and interact with real time data. As a Web HMI, the eX200 series HMIs can easily display HTML5 data from multiple devices.


eX200 Web Series products offer great integration options in enterprise networks and cloud communication. When used in combination with services by CORVINA, remote connectivity and smart data sharing are available for optimal performance in smart factory applications.

eX215 Web Technical Data




| System Resources | |
|------------------------------|--|
| Display - Colors | 15.6" - 16.7M |
| Resolution | 1920X1080 |
| Brightness | 350 Cd/m ² typ. |
| Dimming | Yes |
| Touchscreen | Projected Capacitive - Multitouch |
| CPU | 64-bit RISC quad core - 1.6GHz |
| Operating System | Linux |
| Flash | 4 GB (pSLC mode - High reliability) |
| RAM | 2 GB |
| Real Time Clock | Yes |
| RTC Back-up | Supercapacitor |
| Interface | |
| Ethernet port | 1 (10/100 Mbit) |
| USB port | 1 (Host v. 2.0, max. 500 mA) |
| Buzzer | Yes |
| Indicator Light | 1 (RGB LED) |
| Ratings | |
| Power supply | 24 Vdc (9 to 32 Vdc) |
| Current Consumption | 0.75 A max. at 24 Vdc |
| Input Protection | Electronic |
| Environment Conditions | |
| Operating Temperature | -20°C to +55°C (vertical installation) |
| Storage Temperature | -30°C to +70°C |
| Operating / Storage Humidity | 5-85% RH, non condensing |
| Protection Class | IP66 (front), IP20 (rear) |
| Dimensions and Weights | |
| Faceplate LxH | 422x267 mm (16.61"x10.51") |
| Cutout AxB | 411x256 mm (16.18"x10.08") |
| Depth D+T | 35+10 mm (1.38"+0.39") mm |
| Weight | 3.2 Kg |
| Approvals | |
| CE | Electromagnetic Compatibility Directive 2014/30/EU (EMC) |
| UL* | cULus: UL61010-1 / UL61010-2-201 |
| RCM | Yes |

* Roadmap 2024

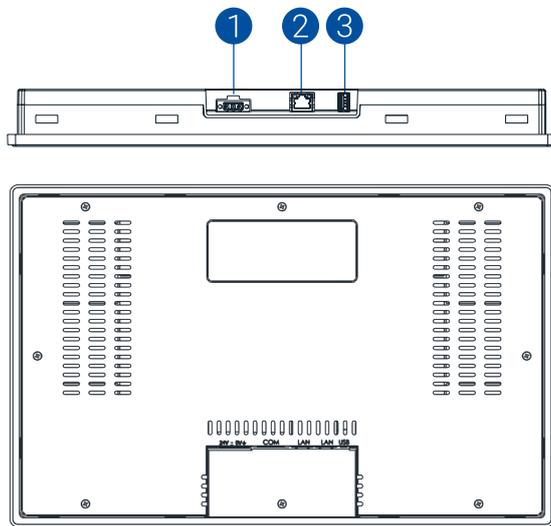

- 1 Power Supply
- 2 Ethernet Port
- 3 USB port (vers. 2.0-1.1)

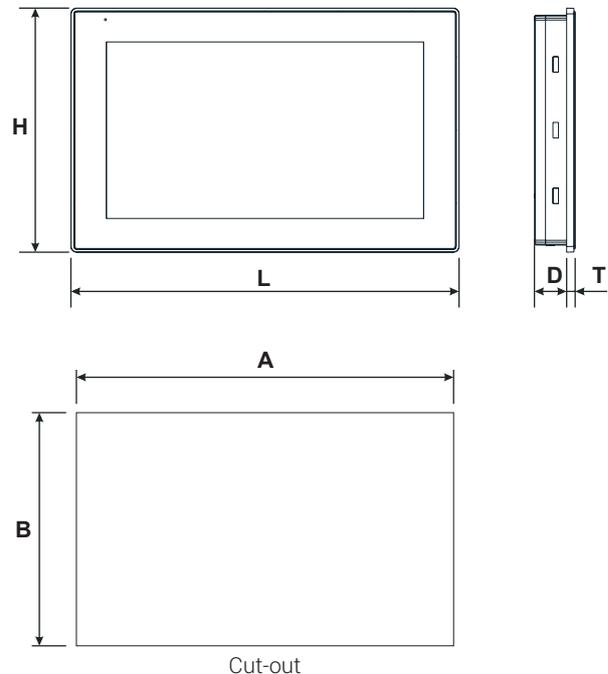

Ordering Information

| Model | Ordering Code | Part Number | Description |
|-----------|--------------------|-------------|---|
| eX215 Web | 101006200U-0007-01 | +EX215U50W | 15.6" Web based HMI, Capacitive Touchscreen, 1 Ethernet Port. |